


V-REGI Series
Store Support System
Standard Package
Sales Management System
E-mail Remote Control
Reference Manual

V-R7000



V-R100

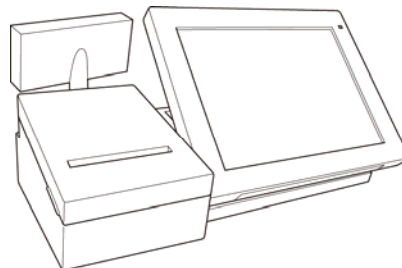

Introduction



This manual explains how to use the Sales Management System for managing your sales.

This manual describes following equipment.

- Casio shop support terminal V-R7000 (Display: 15.6 in. WXGA TFT LCD 1366 × 768)
- Casio shop support terminal V-R100 (Display: 10.4 in. SVGA TFT LCD 800 × 600)

The screens and illustrations used in this manual may differ from those of the actual devices. Keys and icons are simplified for publication.

Take Advance Notice of the Following

- The content of this manual may change without notice due to improvements to the devices and/or changes in their specifications.
- Please be forewarned that Casio bears no responsibility for damages, lost profits or claims from third parties arising from the loss or corruption of data due to the use, breakdown or repairs to the device or the use of this manual.
- The copyrights for this manual, as well as all rights related to the software noted in this manual are the property of Casio Computer Co., Ltd, unless specifically noted otherwise. The unauthorized reproduction of this manual and/or the software in whole or part is prohibited without the express, written permission of Casio.
- Casio has taken all possible care in producing this manual so it is error-free, however, if you should notice an unclear point, mistake or omission, please do contact us and let us know.
- The screens and illustrations used in this manual may differ from those of the actual devices. Keys and icons are simplified for publication.
-   SD and SDHC Logos are trademarks of SD-3C, LLC.

Contents

Introduction

<i>Introduction</i>	4
---------------------------	---

<i>SECTION 1: Introduction of the E-mail Remote Control</i>	6
--------------------------------------------------------------------------	---

1.1 Outline of the system	6
---------------------------------	---

1.2 Function list	7
-------------------------	---

<i>SECTION 2: Basic programming of E-mail Remote Control</i>	9
---------------------------------------------------------------------------	---

2.1 How to set up E-mail function	9
-----------------------------------------	---

2.1.1 Set up an E-mail function	9
---------------------------------------	---

2.1.2 Type of receiving mail server	10
-------------------------------------------	----

2.1.3 Detail of receiving mail server	12
---------------------------------------------	----

2.1.4 Detail of sending mail server	13
-------------------------------------------	----

2.1.5 Option settings of account	14
----------------------------------------	----

2.1.6 Account name	15
--------------------------	----

2.2 Programming receiving commands	16
------------------------------------------	----

2.2.1 Programming of mail information table(1)	16
------------------------------------------------------	----

2.2.2 Programming for E-Mail Information	17
------------------------------------------------	----

2.3 Programming for Reservation E-Mail	18
----------------------------------------------	----

<i>SECTION 3: Commands and Responses</i>	20
-------------------------------------------------------	----

3.1 Commands	20
--------------------	----

3.1.1 Contents of sending e-mail	20
----------------------------------------	----

3.2 Responses	20
---------------------	----

3.2.1 Contents of responded e-mail	21
------------------------------------------	----

Introduction

This manual explains the function and operation of E-mail Remote Control.

Take advance notice

The copyrights for this manual, as well as all rights related to the software noted in this manual are the property of CASIO Computer Co., Ltd.

The unauthorized reproduction of this manual in whole or part is prohibited without the express, written permission of CASIO

The content of this manual may change without prior notice due to improvements to the product and/or changes in their specifications.

Section 1

Introduction of


E-mail Remote Control

SECTION 1: Introduction of the E-mail Remote Control

1.1 Outline of the system

E-mail Remote Control can receive an e-mail with specific commands to respond back to the V-REGI with flash sales report within E-mail.

Following chart describes E-mail Remote Control functions.

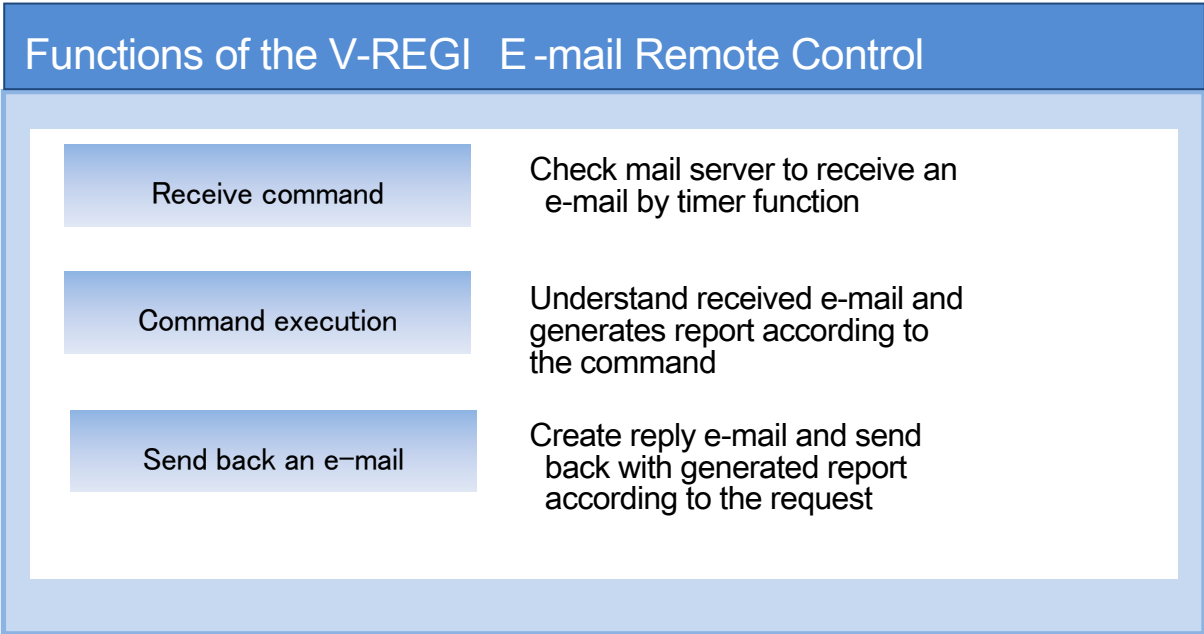

1.2 Function list

<Flash sales report >

You can receive an e-mail including today's flash report (Gross sales amount and number of customers) from the V-REGI sales application.

<Flash customer report>

You can receive an e-mail including today's total number of registered customers and newly registered customers.

<Flash reservation report>

You can receive an e-mail including today's total number of reservations and number of newly registered customer.

SECTION 2

Basic programming of E-mail


Remote Control

SECTION 2: Basic programming of E-mail Remote Control

2.1 How to set up E-mail function

Prior to starting this setting, your e-mail account should be available.

2.1.1 Set up an E-mail function

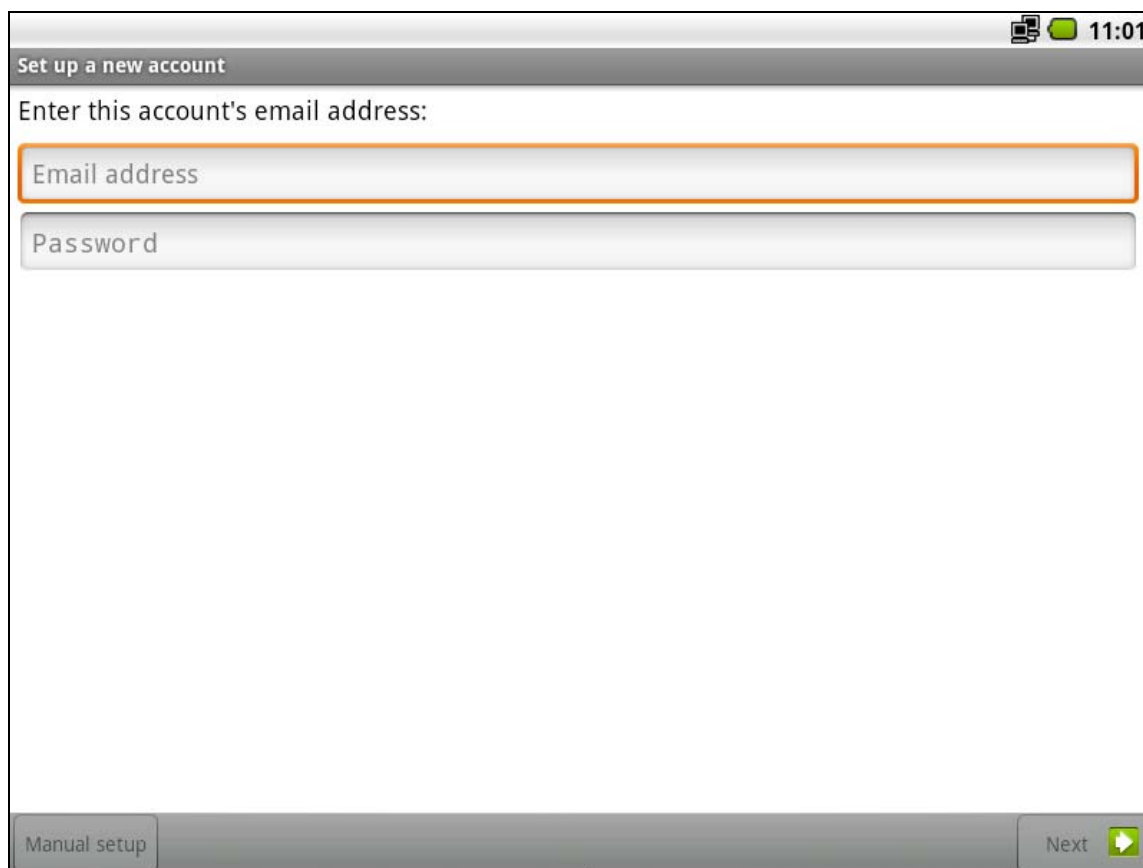


The screenshot shows an Android phone screen with the following elements:

- Top status bar: Battery icon, signal strength icon, and time '11:01'.
- Title bar: 'Set up a new account'.
- Text prompt: 'Enter this account's email address:'.
- Input fields: 'Email address' (highlighted with an orange border) and 'Password'.
- Bottom bar: 'Manual setup' button on the left and 'Next' button with a green arrow on the right.

- Enter e-mail address and password then tap <NEXT> button


2.1.2 Type of receiving mail server

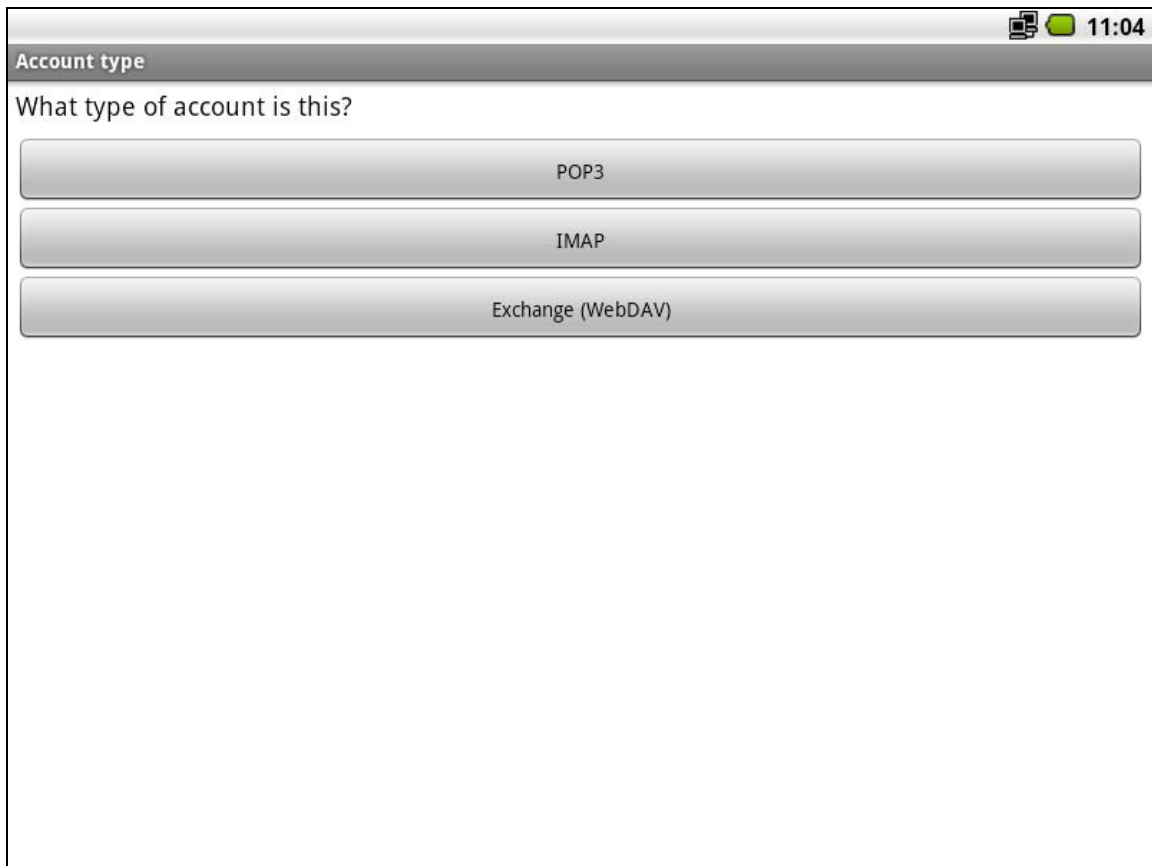

- Selecting the type of receiving mail server will change the menu screen

If you need to change the type of server, it is necessary to delete the current settings first then Select desired type of server as explained below.

(1) Select Android “Settings”-> “Applications”->”Manage applications”-> “Remote Control by E-mail”-> “Force stop”->”Clear data” then press <OK>

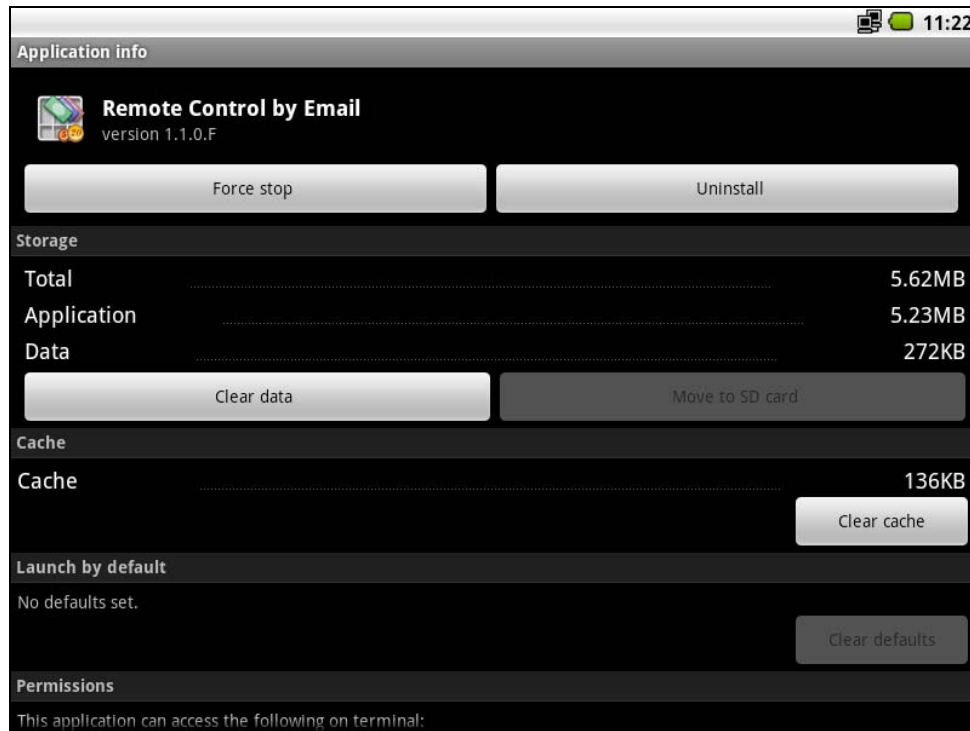

(2) Follow above steps but perform “Force stop” so that VX-100 will restart cash register Application.

2.1.3 Detail of receiving mail server

Incoming server settings

Username
vx100-sample@casio.co.jp

Password
.....

IMAP server
mail.casio.co.jp

Security type
None

Authentication type
PLAIN


Port
143

IMAP path prefix
(Automatic using NAMESPACE if available)


Use compression or not
None

Next

- Enter required information to the appropriate field and tap <NEXT>
- After showing certificate, tap <Permission> to connect server for verification.

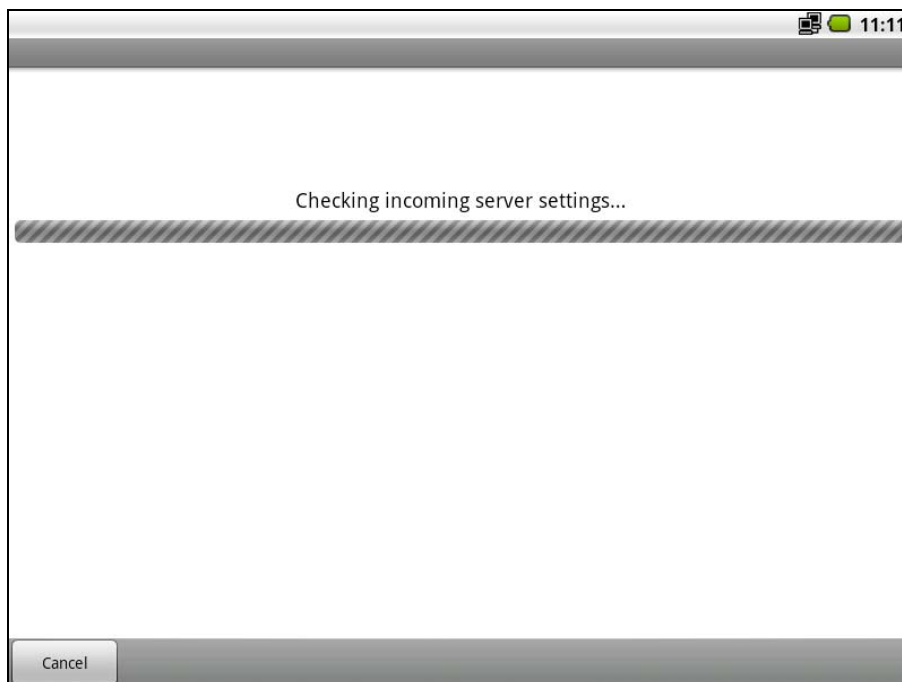

2.1.4 Detail of sending mail server

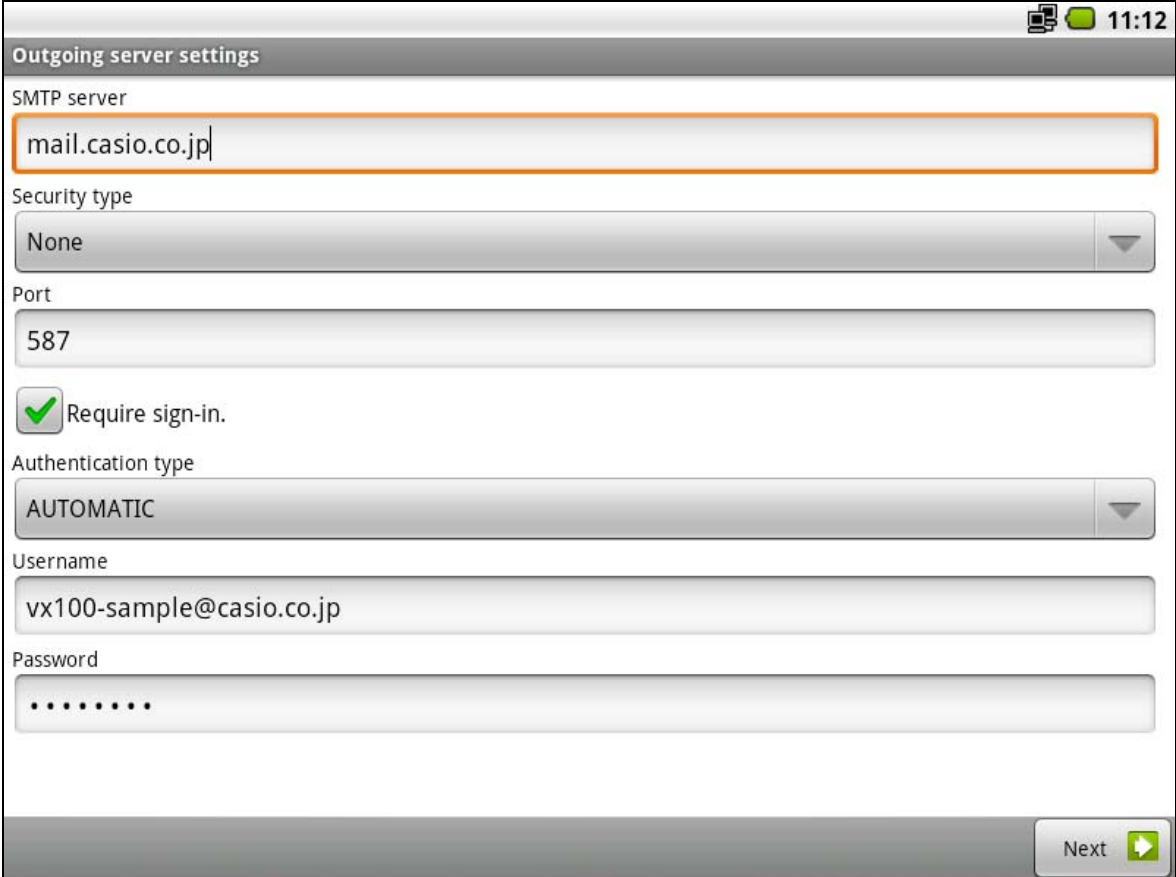

Outgoing server settings

SMTP server
mail.casio.co.jp

Security type
None

Port
587

Require sign-in.


Authentication type
AUTOMATIC

Username
vx100-sample@casio.co.jp

Password
.....

Next

- Enter required information to the appropriate field and tap <NEXT> for verification
- Tap <NEXT> will be started server check

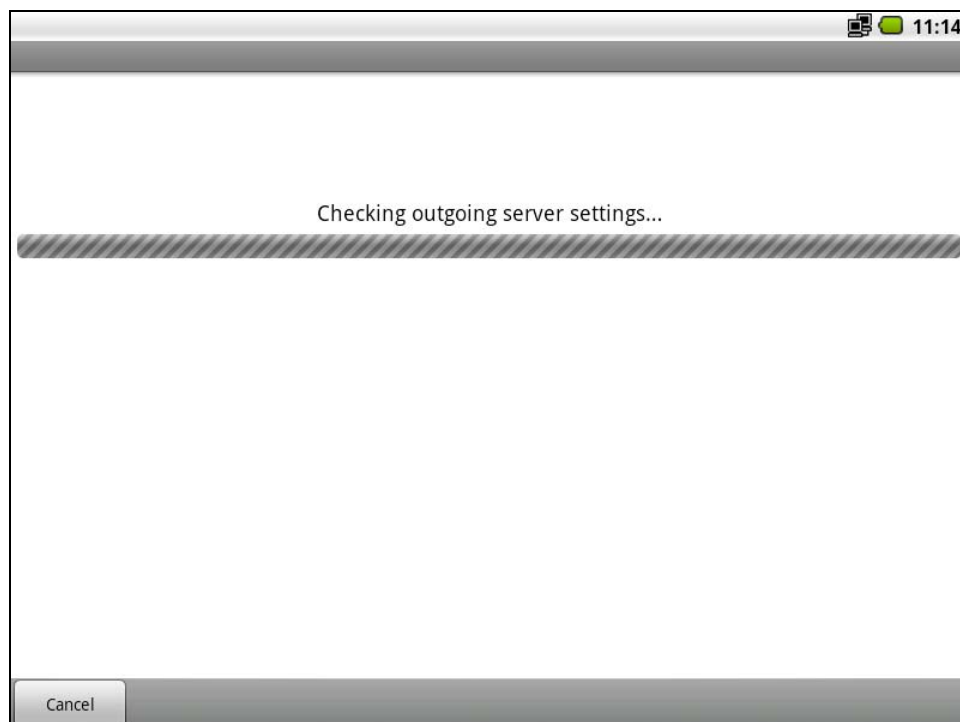

2.1.5 Option settings of account

Account options

Folder poll frequency
Every minute

Number of messages to display
25 messages


Notify me when mail arrives

Notify me while mail is being checked

Next

- Enter required account options and tap <NEXT>

2.1.6 Account name

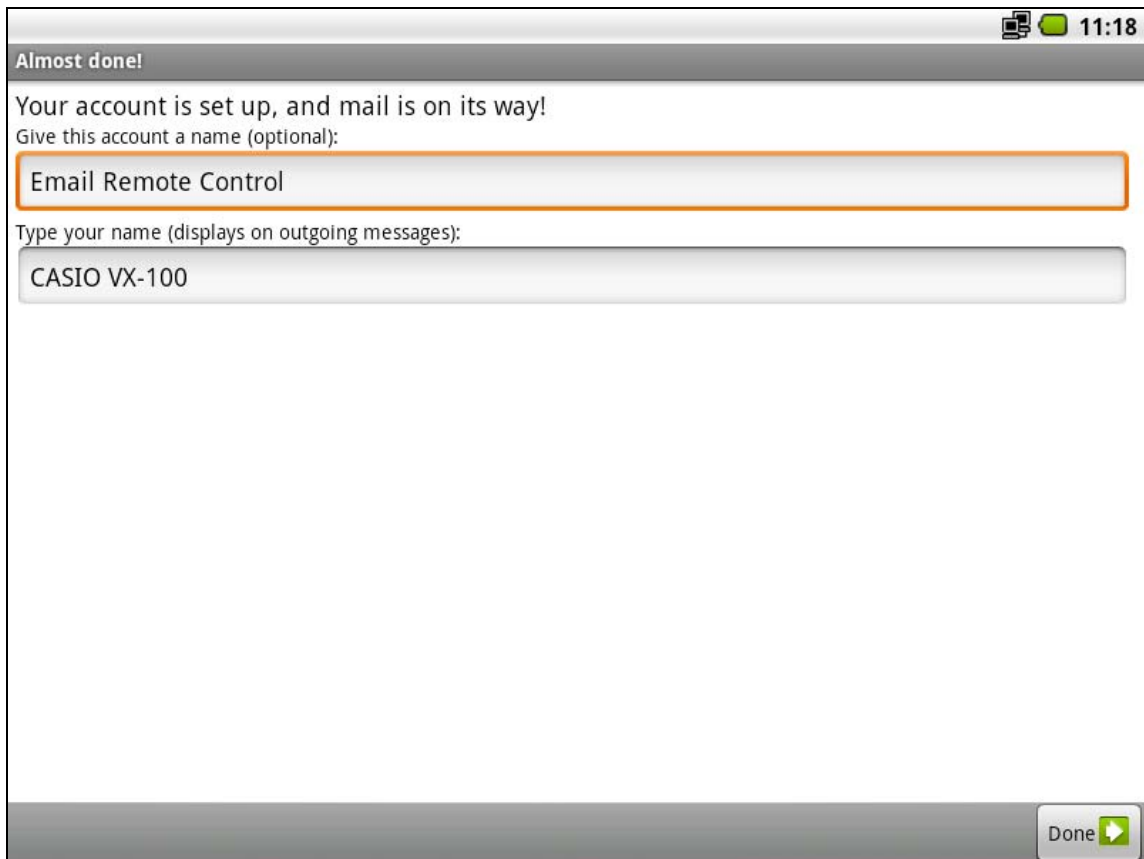

Almost done!

Your account is set up, and mail is on its way!
Give this account a name (optional):

Email Remote Control

Type your name (displays on outgoing messages):

CASIO VX-100

Done →

- Enter appropriate name for your account and name for outgoing messages and tap <Done> to finish.

2.2 Programming receiving commands

2.2.1 Programming of mail information table(1)

You have to make sure that e-mail set up is completed in order to perform setting of mail information table (1). An e-mail receive tray will appear after selecting E-mail Remote control icon.


Press and hold display on/off button where located at right side of the V-REGI for few seconds then following three icons will be appeared on your screen. It is MENU, HOME and Return.



Tap top icon “MENU” will show you two keys <Check mail> and <Settings>



Tap < Settings >, this will show you the set up dialog

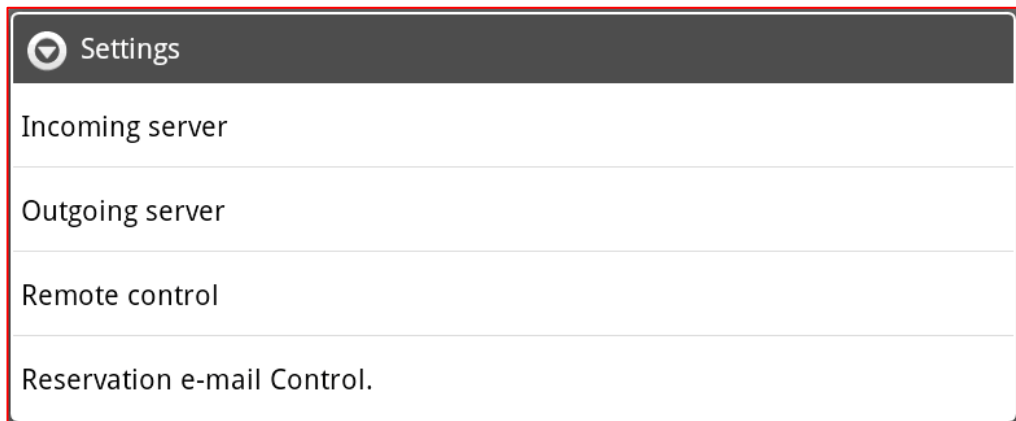

Tap <Remote control > for “E-mail remote control”

<Reservation e-mail Control> is settings for Reservation.

2.2.2 Programming for E-Mail Information

11:21

Edit eMail Info.

Your name

CASIO VX-100

Use remote control by email

Receive Email address[1]

Receive Email address[2]

Receive Email address[3]

Receive Email address[4]

Receive Email address[5]

- Tick “Use E-mail remote control”
- V-REGI can be programmed for up to five different e-mail addresses to be received and respond command to send back reports.
- Upon your completion of all your settings, use <return> key to go back the main menu.

2.3 Programming for Reservation E-Mail

Reservation e-mail Control.

Received e-mail Address [1].

Received e-mail Address [2].

Received e-mail Address [3].

Received e-mail Address [4].

Received e-mail Address [5].

**<Reservation e-mail Control> is settings for Reservation.
Enter E-Mail address to receive reservation.**

SECTION 3

Commands and Responses

SECTION 3: Commands and Responses

3.1 Commands

Following three commands are available on the V-REGI

1. Request flash sales report
2. Request flash customer sales report
3. Request flash reservation report

3.1.1 Contents of sending e-mail

Request should be following conditions (single byte code. Never use double byte code)

1. Requesting flash sales report
Subject Line: command
Email Body: Sales.Flash.Report
2. Requesting flash customer report
Subject Line: command
Email Body: Customer.Flash.Report
3. Requesting flash reservation report
Subject Line: command
Email Body: Reserve.Flash.Report

3.2 Responses

Three types of replies are responding according to the executed commands.


1. Flash sales report
2. Flash customer report
3. Flash reservation report

3.2.1 Contents of responded e-mail

- 1 . Reply e-mail for request of flash sales report

Subject Line: “Auto responding e-mail”

Email Body: Current gross sales amount and number of customers.

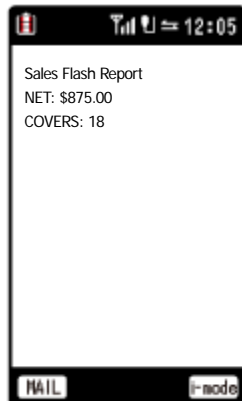


※Sample Image

2. Reply e-mail for request of flash customer report

Subject Line: “Auto responding e-mail”

Email Body: Total number of customer and today’s registered customer

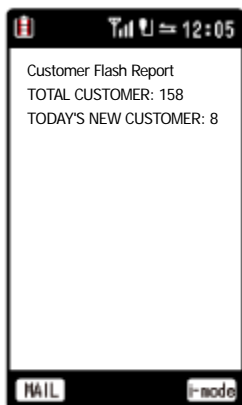

※Sample Image

3. Reply e-mail for request of flash reservation report

Subject Line: “Auto responding e-mail”

Email Body: Number of today’s reservation and newly registered



※Sample Image

CASIO®

CA1510-A

Sales Management System

E-mail Remote Control Reference Manual